



EQUIPMENT FEATURES

NOTE: BEFORE FILLING SPA, PLEASE FAMILIARIZE YOURSELF WITH THE FEATURES OF THE EQUIPMENT MODULE & CONTROL


SPA CONTROLLER FUNCTIONS

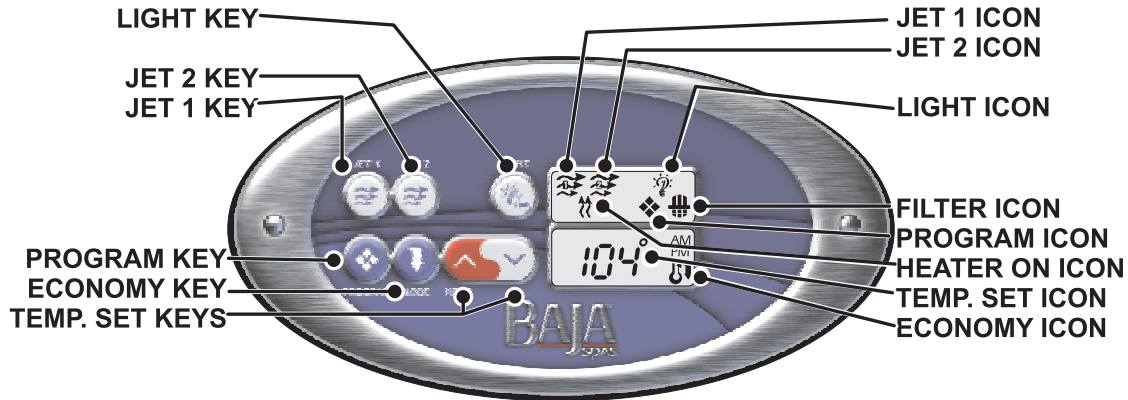

JETS KEYS: Press the Jet 1 or Jet 2 key once to activate the low speed of the desired pump, press the key a second time to activate high speed and pressing it a third time will turn the pump off. After 20-minutes, the pump will shut off automatically unless done so manually. The JETS icon will illuminate while the pump is on in high speed and flash in low speed. If a filter cycle is active, the “filter cycle” indicator will be illuminated (the JETS indicator WILL NOT be on during filtration). (Only WhiteWaterXS has second Jet)

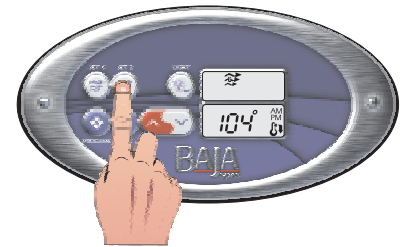

LIGHT/ENTER KEY: Use the spa’s light key to turn NIGHTSCAPE on and off. The Light Icon will appear while the light is on. Lights are preprogrammed with an assortment of light shows. When you press the Light key off and then on again within five seconds, it advances to the next show. When you turn NIGHTSCAPE off and leave it off for more than five seconds, it “remembers” the last show you selected. The next time you turn NIGHTSCAPE on, it will display the last show programmed. (See page 11 for show schedule.) The light will automatically shut off after 2 hours.

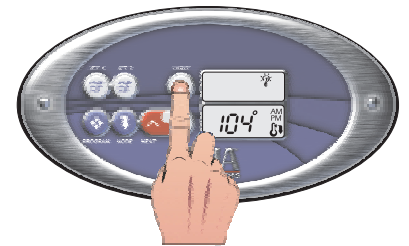

TEMPERATURE SET KEY: Press the up arrow to increase the temperature. Press the down arrow to decrease the temperature. The temperature can be adjusted in 1°F increments from 59°F to 104°F (5°C to 40°C). The new setting will remain on the display for 5 seconds as confirmation. During this time the Temp. Set icon will appear to let you know this is the desired and not the actual temperature. After 5 seconds, the display will return to the current temperature reading. When the temperature drops to 1°F below the set temperature, the heater will be turned on until the temperature is 1°F above the set temperature. The Heater On icon will appear while the heater is on and flash when there is a call for heat and the heater has not yet been activated.

